




AD-170HEPA

MAXIMUM CAPACITY (DRY WEIGHT)		170 lb	77.11 kg	
TUMBLER DIAMETER		51-1/2"	130.81 cm	
TUMBLER DEPTH		42-1/2"	107.95 cm	
TUMBLER VOLUME		51.20 cu ft	1,449.82 L	
TUMBLER/DRIVE MOTOR		1 hp	0.75 kW	
BLOWER/FAN MOTOR		7-1/2 hp	5.59 kW	
DOOR OPENING (DIAMETER)		31-3/8"	79.69 cm	
DOOR SILL HEIGHT		N / A		
WATER CONNECTION		N / A		
DRYERS PER 20'/40' CONTAINER		3 / 7		
DRYERS PER 48'/53' TRUCK		8 / 8		
Gas	VOLTAGE AVAILABLE			
	APPROXIMATE NET WEIGHT			
	APPROXIMATE SHIPPING WEIGHT			
	AIRFLOW			
	HEAT INPUT			
	EXHAUST CONNECTION (DIAMETER)			
	COMPRESSED AIR CONNECTION			
	COMPRESSED AIR VOLUME			
	INLET PIPE CONNECTION			
N / A				
Electric	VOLTAGE AVAILABLE			
	APPROXIMATE NET WEIGHT			
	APPROXIMATE SHIPPING WEIGHT			
	AIRFLOW			
	EXHAUST CONNECTION (DIAMETER)			
	COMPRESSED AIR CONNECTION			
	COMPRESSED AIR VOLUME			
	OVEN SIZE			
	kW	Btu/hr	kcal/hr	
N / A				
Steam	VOLTAGE AVAILABLE			
	208-575v	3ø	3,4w 50/60 Hz	
	APPROXIMATE NET WEIGHT		2,050 lb	929.86 kg
	APPROXIMATE SHIPPING WEIGHT		2,220 lb	1,006.98 kg
	AIRFLOW		4,400 cfm	124.59 cmm
	STEAM CONSUMPTION		725 lb/hr	328.85 kg/hr
	OPERATING STEAM PRESSURE		125 psi max	8.62 bar
	EXHAUST CONNECTION (DIAMETER)		18"	45.72 cm
	COMPRESSED AIR CONNECTION		1/8" F.N.P.T.	
	COMPRESSED AIR REQUIREMENT		80 psi	5.52 bar
	COMPRESSED AIR VOLUME		3.25 cfh	0.09 cmm
	BOILER HORSEPOWER (NORMAL LOAD)		19 Bhp	
	SUPPLY CONNECTION		1-1/2" F.N.P.T.	
RETURN CONNECTION		1-1/2" F.N.P.T.		

(ADSH-170 HEPA FILTER DRYER)

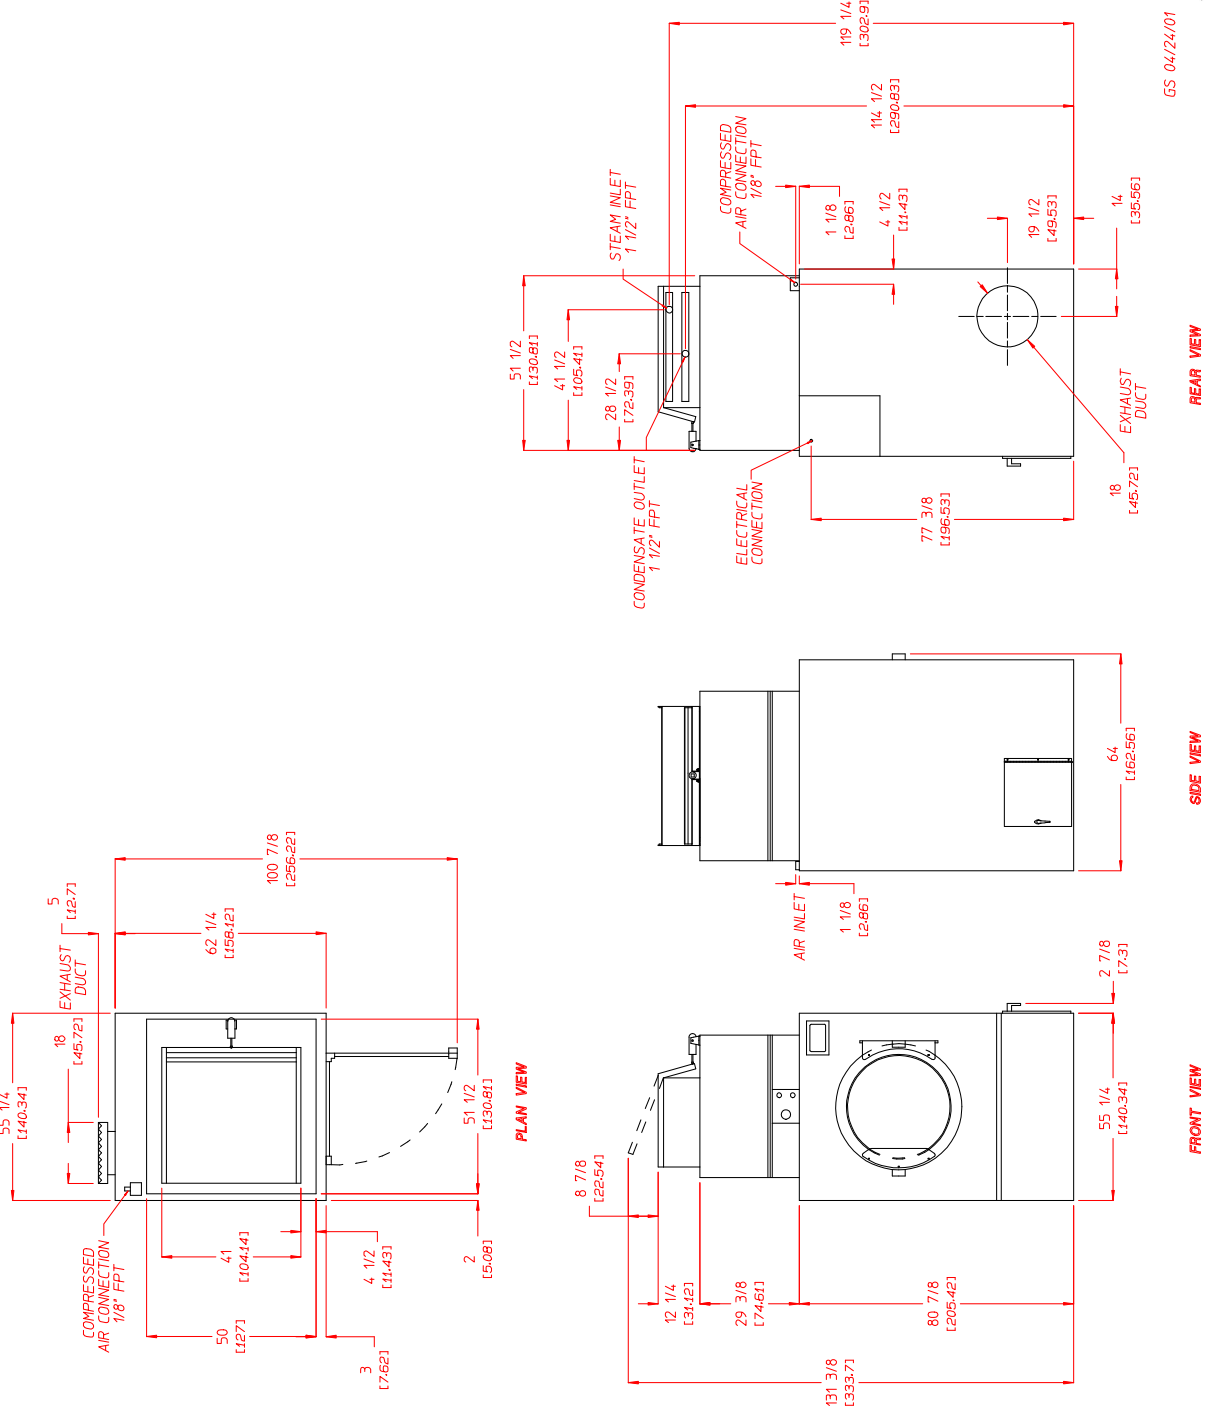

GS 04/24/01



88 Currant Road • Fall River, MA 02720
 Tel. 508-678-9000 • Fax 508-678-9447
 sales@amdry.com • www.amdry.com